



Welder & Generator


Span Technology

Welder & Generator

Span Technology



S10000DEW/3

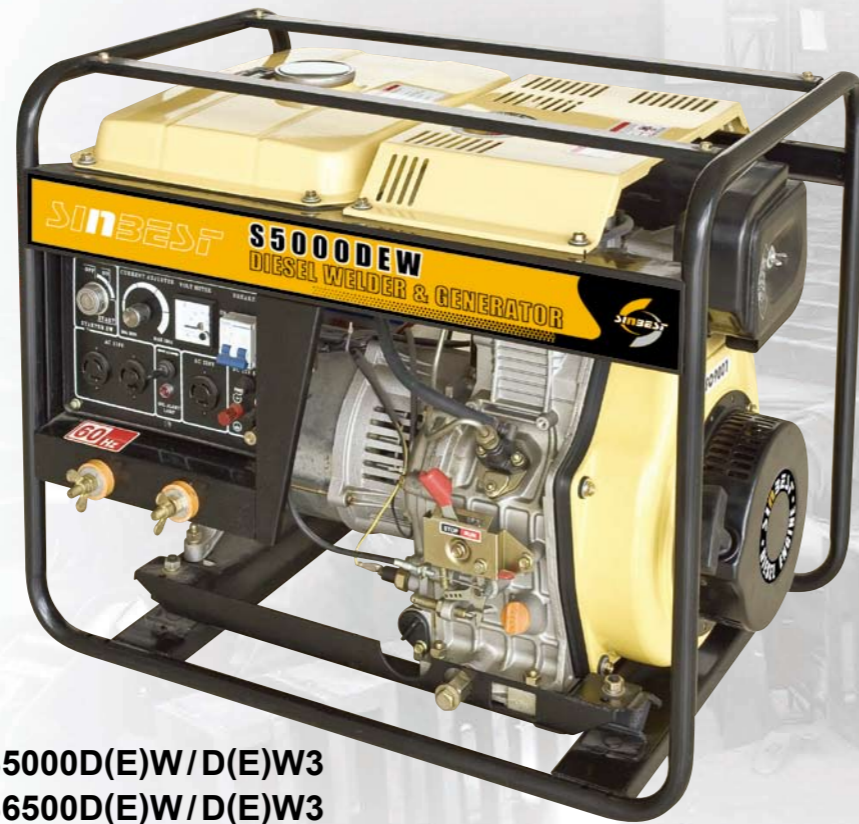

**S5000D(E)W/D(E)W3
S6500D(E)W/D(E)W3**



**S5000DSW
S5000DSW3
S6500DSW
S6500DSW3**



**S5000DSW-1
S5000DSW3-1
S6500DSW-1
S6500DSW3-1**

Diesel Welder & Generator

型号	Model	S5000D(E) W	S5000D(E) W3	S6500D(E) W	S6500D(E) W3	S10000DEW	S10000DEW3
频率	Frequency (HZ)	50/60	50/60	50/60	50/60	50/60	50/60
额定电压	Rated voltage (V)	110,120,220,230,240	220/380	110,120,220,230,240	220/380	110, 120, 220, 230, 240	220/380
额定功率	Rated output KVA	4.2/4.5	1.8/2.0	4.6/5.0	1.8/2.0	2.8/3.0	2.8/3.0
最大功率	Max output KVA	4.5/5.0	2.0/2.2	5.0/5.5	2.0/2.2	3.3/3.5	3.3/3.5
功率因数	Power factor	1.0 / 0.8 (Three phase)				1.0	1.0 / 0.8 (Three phase)
焊接电压	Welding voltage (DC) (V)	25-30	25-30	25-30	25-30	25-30	25-30
额定焊接电流	Rated welding current DC	50A-160A	50A-160A	50A-160A	50A-160A	50A-280A	50A-280A
焊条直径	Electrode (mm)	1.6-4.0	1.6-4.0	1.6-4.0	1.6-4.0	1.6-5.8	1.6-5.8
噪音等级 (7米处)	Noise Level (7m) db (A)	77	77	77	77	80-83	80-83
发动机型号	Engine model	S186F(E)		S186FA(E)		SV840F	SV840F
燃油箱容量	Fuel tank capacity (L)	12.5	12.5	12.5	12.5	25	25
连续工作时间	Continuous running time (hr)	6.5	6.5	6.5	6.5	12	12
启动系统	Starting system	手动反冲启动 / 电启动 Manual / Electric start				电启动 Electric start	
包装尺寸	Packing size (L*W*H) mm	730*495*620	730*495*620	730*495*620	730*495*620	885*650*745	935*650*745
净重	Net weight (KG)	95	95	95	95	170	170

Silent Diesel Welder & Generator

型号	Model	S5000DSW/ S5000DSW-1	S6500DSW/ S6500DSW-1	S5000DSW3/ S5000DSW3-1	S6500DSW3/ S6500DSW3-1
频率	Frequency (HZ)	50/60	50/60	50/60	50/60
额定电压	Rated voltage (V)	110, 120, 220, 230, 240			220/380
额定功率	Rated output KVA	4.2/4.5	4.5/5.0	1.8/2.0	1.8/2.0
最大功率	Max output KVA	4.5/5.0	5.0/5.5	2.0/2.2	2.0/2.2
功率因数	Power factor	1.0	1.0	0.8	0.8
焊接电压	Welding voltage (DC) (V)	25-30	25-30	25-30	25-30
额定焊接电流	Rated welding current DC	50-180	50-180	50-180	50-180
焊条直径	Electrode (mm)	1.6-4.0	1.6-4.0	1.6-4.0	1.6-4.0
噪音等级 (7米处)	Noise Level (7m) db (A)	72	72	72	72
发动机型号	Engine model	S186FE	S186FAE	S186FE	S186FAE
燃油箱容量	Fuel tank capacity (L)	12.5	12.5	12.5	12.5
连续工作时间	Continuous running time (hr)	7.5	7.5	7.5	7.5
启动系统	Starting system	电启动 Electric start			
包装尺寸	Packing size (L*W*H) mm	910*530*710/ 91*545*715	910*530*710/ 915*545*715	910*530*710/ 915*545*715	910*530*710/ 915*545*715
净重	Net weight (KG)	165	165	165	165